

## Powerful Mainstream Solution For Modern Businesses

*CAP1200*

*2 x 2 AC Dual-Band Ceiling-Mount PoE  
Access Point*



### KEY FEATURES

- 802.11AC Dual-Band High Speed:** IEEE 802.11ac concurrent dual-band with 1200Mbps wireless speed.
- Easy Installation:** Ceiling-mount & T-rail mount design with easy installation kit.
- Compact & Durable Housing:** Ultra slim design with UL94-5VB flame-retardant plastic housing.
- Designed for High Density Usage:** Supports up to a hundred users simultaneously, ideal for crowded environments and BYOD (Bring Your Own Device) workplaces.
- Multiple SSIDs for Security Management:** Supports up to 32 SSIDs (16 x 2.4GHz & 16 x 5GHz) ideal for multiple departments, user groups, customers or guests.
- Fast Roaming:** Roams smoothly between APs without lag or interruption, ensuring top performance for video and voice streaming applications.
- Wide Coverage & High Sensitivity:** Adjustable RF output power and high receiver sensitivity for wide coverage across large spaces.
- Seamless Mobility:** 1.5x greater coverage than typical APs for blanket coverage to ensure seamless connectivity for Wi-Fi devices across enterprise environments.
- Power over Ethernet:** Supports IEEE 802.3af PoE as well as included power adapter.
- Built-In RADIUS Server:** With management for up to 256 user accounts.
- Business Environments:** Mainstream choice for SMBs. Suitable for a wide range of commercial applications such as offices, hotels, meeting rooms, schools, campuses, resorts, retail and others.
- Central Management:** Edimax Pro Network Management Suite (NMS), easy and Intuitive web-based central management suite, supports AP array architecture.


The CAP1200 is a powerful wireless solution designed to meet the needs of modern mainstream businesses with the latest IEEE 802.11ac technology for wireless speeds up to 1200Mbps. Industrial-grade performance and build quality combined with user-friendly operation, super-fast wireless speed, an extensive feature set and a practical, ceiling-mount design make an ideal dual-band solution for enterprise environments.

For businesses that demand security, flexibility and speed – the Edimax Pro series has a wide range of potential applications from office environments to schools, campuses, hotels and hospitals. High-density capacity for up to 100 simultaneous users is ideal for BYOD workplaces or other environments with a high volume of users and wireless devices. Multiple SSIDs can be configured for different departments or user groups and a built-in RADIUS server provides additional verification with a scalable AP array architecture for central management of multiple access points. Fast roaming for seamless transitions between access points, Power over Ethernet support (PoE) and an intuitive web-based management interface provides flexibility for deployment and extensive management options for company MIS departments and network administrators.

When performance and security are critical for your business, you need products that are engineered for your industry. The Edimax Pro series is designed to help your business and provide the connectivity that you rely on every day, with safety and effectiveness guaranteed.

## Wide Coverage & Multiple SSIDs

## BYOD Solution & High Density Networking


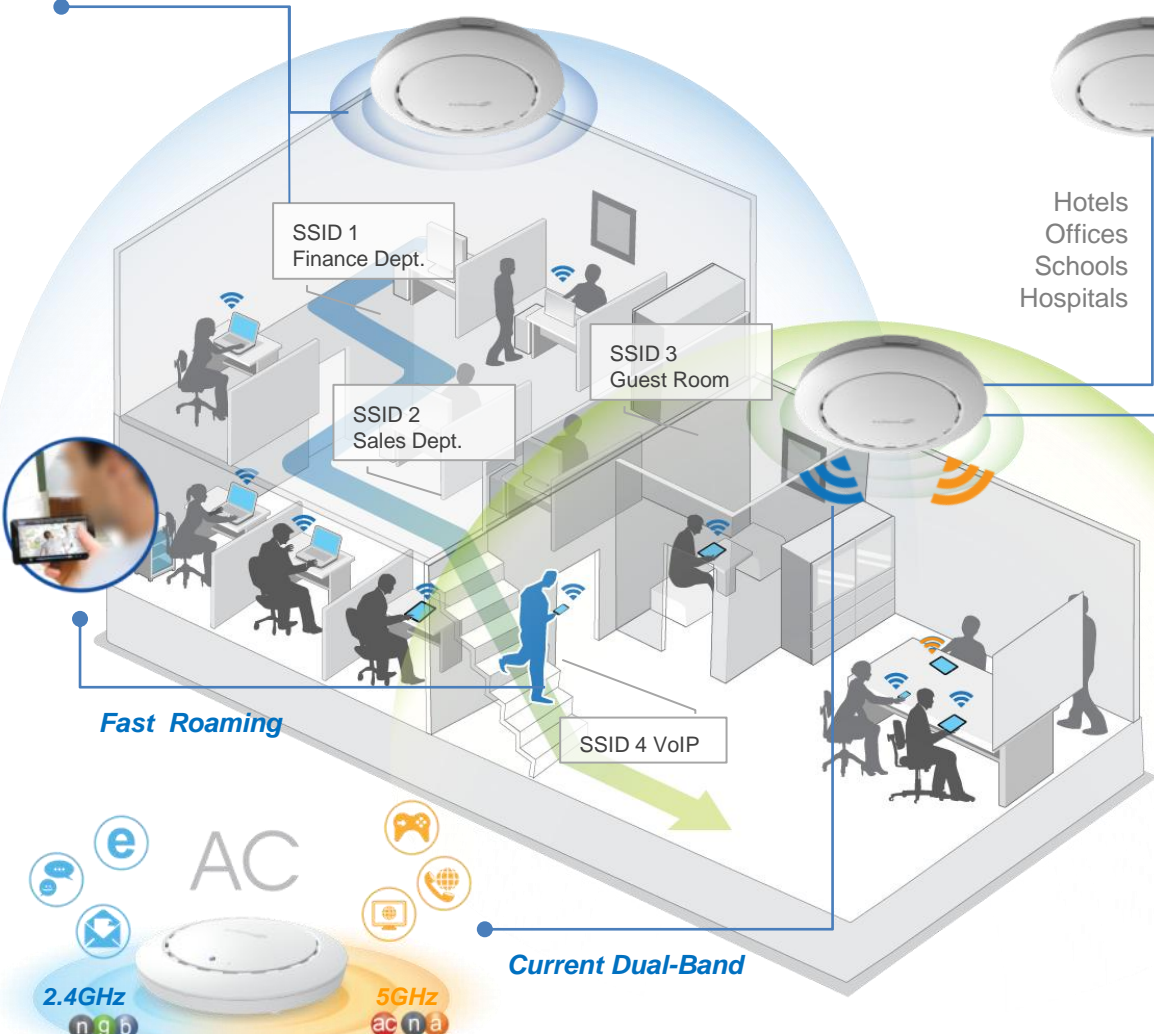


Hotels  
Offices  
Schools  
Hospitals




## Easy Installation Kit


Ceiling mount and T-rail mount with bracket.

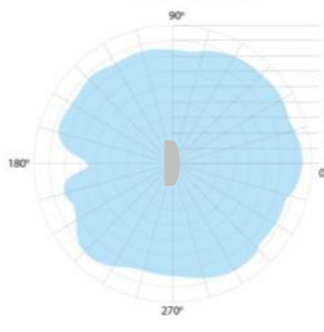


**2.4GHz**  
2D Radiation Pattern @ Vertical

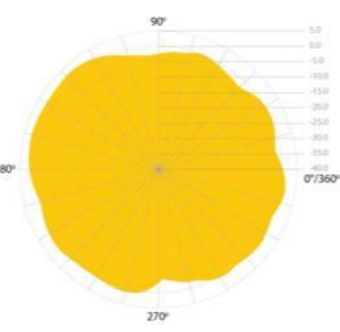

**5GHz**  
2D Radiation Pattern @ Vertical

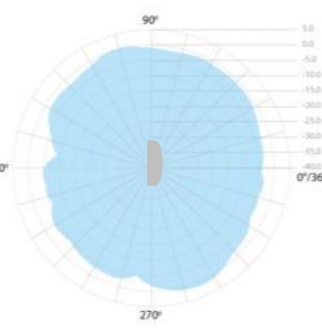

**2.4GHz**  
2D Radiation Pattern @ Horizontal

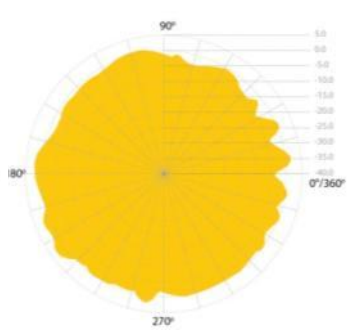

**5GHz**  
2D Radiation Pattern @ Horizontal

## Central Network Management Suite



Edimax Pro NMS (Network Management Suite) is a web-based wireless network management system. Company MIS persons can plan and manage Edimax Pro access points' powerful functionality according to their office space using an easy, remote web-based interface which includes a dashboard, map view, traffic statistics and wireless client list for network-wide remote administration. RADIUS settings, WLAN group settings, access control, guest network settings and firmware upgrades can all be managed centrally from a single location to reduce network downtime, aid troubleshooting and optimize network performance. Zone plans and setup wizards are also available for expanding and managing large networks with multiple access points.

# 2 x 2 AC Dual-Band Ceiling-Mount PoE Access Point

## SPECIFICATIONS

Hardware	
LAN Interface	Giga x 1
PoE	802.3af (Supports 802.3at)
Antenna	Type: 4 x Built-In PIFA (2 x 2.4GHz, 2 x 5GHz) / Gain: 2.82dBi (2.4GHz), 4dBi (5GHz) Max.
Power	DC: 12V / 1A 802.3af (PoE Injector Optional)
Dimensions	17.6 (D) x 3.2 (H) cm
Weight	305.7g
Power Consumption (Full Loading)	11W
Mounting	Ceiling
Reset	Y
LED Indicator	1. Power LED 2. Diag LED
Environmental Conditions	Operating Temperature: 0°C (32°F) to 40°C (104°F) Operating Humidity: 90% or Less UL94-5VB Flammability Rating
Power Saving	802.3az
Internal Buzzer	Y
Wireless	
Standard	802.11 a/b/g/n/ac Concurrent Dual-Band
No. of Radios	2
Max. Output Power (dBm)	2.4GHz: 26dBm / 5GHz: 26dBm
Receiver Sensitivity	≤ -95dBm
Transmit Power (mW)	400mW/400mW
Certification	CE/FCC
Fast Roaming	Y
Number of SSIDs	16 (2.4GHz) + 16 (5GHz)
Performance	
Maximum Data Speed	300 + 867Mbps
Concurrent Clients	Up to 50 Per Radio
Software	
Wireless Mode	AP / WDS AP / WDS Bridge
802.1q VLAN	Y (VID = 1-4094)
Spanning Tree	RSTP
QoS	WMM (802.11e) Max Associated Station No.
Pass-Through	IPv6 and VPN (PPTP, L2TP/IPsec)
DSCP (802.1p)	Y
Multicast Rate up to 54Mbps	Y
Management	
Deployment	Standalone Managed by Edimax Pro NMS
Configuration	HTTP/HTTPS SNMP v1, v2c, v3 CLI (Telnet, SSH)
RADIUS Server	Built-In
Auto-Channel	Y
Private MIB	Y

RF Specifications		
Frequency Band	<ul style="list-style-type: none"> <li>•Radio I : 802.11b/g/n 2.412~2.484(GHz)</li> <li>•Radio II : 802.11a/n/ac 5.18~5.24(GHz), 5.26~5.32(GHz), 5.5~5.7(GHz), 5.745~5.825(GHz)</li> </ul> (The supported frequency band is restricted by local regulations.)	
Operation Channels	<ul style="list-style-type: none"> <li>•2.4GHz : US/Canada 1-11 / Europe 1-13 / Japan 1-14</li> <li>•5GHz : Country dependent for the following ranges: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165</li> </ul>	
Transmit Power	802.11b 23dBm@1Mbps 23dBm@2Mbps 23dBm@5.5Mbps 23dBm@11Mbps 802.11g 23dBm@6Mbps 23dBm@9Mbps 23dBm@12Mbps 23dBm@18Mbps 23dBm@24Mbps 22dBm@36Mbps 20dBm@48Mbps 19dBm@54Mbps 802.11n (2.4G) 26dBm@MCS0/MCS8 25dBm@MCS1/MCS9 25dBm@MCS2/MCS10 25dBm@MCS3/MCS11 24dBm@MCS4/MCS12 23dBm@MCS5/MCS13 22dBm@MCS6/MCS14 22dBm@MCS7/MCS15	802.11a 23dBm@6Mbps 23dBm@9Mbps 23dBm@12Mbps 23dBm@18Mbps 23dBm@24Mbps 22dBm@36Mbps 20dBm@48Mbps 19dBm@54Mbps 802.11an(5G) 26dBm@MCS0/MCS8 25dBm@MCS1/MCS9 25dBm@MCS2/MCS10 24dBm@MCS3/MCS11 24dBm@MCS4/MCS12 23dBm@MCS5/MCS13 22dBm@MCS6/MCS14 21dBm@MCS7/MCS15 802.11ac 26dBm@MCS0 25dBm@MCS1 25dBm@MCS2 24dBm@MCS3 24dBm@MCS4 23dBm@MCS5 22dBm@MCS6 21dBm@MCS7 19dBm@MCS8 18dBm@MCS9
Receiver Sensitivity	802.11b ≤-95dBm@1Mbps ≤-90dBm@11Mbps 802.11g ≤-91dBm@6Mbps ≤-75dBm@54Mbps 802.11gn (2.4G) ≤-93dBm@MCS0 ≤-73dBm@MCS7 ≤-90dBm@MCS8 ≤-70dBm@MCS15	802.11a ≤-89dBm@6Mbps ≤-72dBm@54Mbps 802.11an(5G) ≤-92dBm@MCS0 ≤-71dBm@MCS7 ≤-89dBm@MCS8 ≤-68dBm@MCS15 802.11ac ≤-86dBm@MCS0 ≤-61dBm@MCS9 ≤-83dBm@MCS10 ≤-58dBm@MCS19
Security		
Encryption	WEP / WPA / WPA2	
Wireless L2 Isolation	Y	
Station Isolation	Y	
IEEE 802.1x Authenticator	Y	
EAP Authentication	EAP-FAST/EAP-SIM/EAP-AKA	
Hidden SSID	Y	
MAC Address Filter	Y	
Wireless STA	Y	
Rogue AP Detection (w/ NMS)	Y	

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.  
Copyright © 2014 Edimax Technology Co. Ltd. All rights reserved.



www.edimax.com