

Greenlee storage boxes protect the tools you depend on for your livelihood. From our smallest storage chests to the large field office, our products are built as tough as the trade. With Greenlee's patented, dual-recessed lock enclosures, you know you'll keep thieves out. And the newest feature on all of Greenlee's storage boxes are the redesigned ergonomic handles – just another way Greenlee is helping to make your job easier.





USA Tel: 800.435.0786 Fax: 800.451.2632

Chests



• Patent pending.



	C	APACIT	Υ			DIN	IENSIONS				WEI	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	E	F	G	Н	LBS.	kg
1332	38717	4.9	14"	32"	19"	—	29.5"	—	—	14.5"	83	37.6
1636	38718	6.7	17"	36"	19"	4"	33.5'	4"	10.5"	10.5"	99	44.9
2142	31651	9.7	20"	42"	20"	4"	39.5"	4"	13.5"	11.5"	113	51
2448	23273	16	24"	48"	24"	4"	45.5"	4"	17.5"	15.5"	156	66
2460	23363	20	24"	60"	24"	4"	57.5"	4"	17.5"	15.5"	182	83
3048	23362	25	30"	48"	30"	4"	45.5"	4"	23.5"	21.5"	183	83
2472	07483	24	24"	72"	24"	4"	69.5"	4"	17.5"	15.5"	185	84

R



Storage

Slant-Top Boxes



	C	APACITY				DIM	ENSIONS	6			WEI	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	E	F	G	Н	LBS.	kg
2260	23270	32	22"	60"	32"	36"	12"	12"	21"	—	228	103
3648	23276	34	36"	48"	30"	48"	5"	12"	27"	11"	273	124
3660	23196	44	36"	60"	30"	48"	5"	12"	27"	11"	282	128

Optional casters available for increased mobility. See page 330 for options





Flat-Top Boxes












- Flat-top design provides more storage capacity for tall, bulky items, plus a large work surface for jobsite plans.
- Recessed and concealed lock protector inhibits forced entry and corrosion to lock.
- Channel reinforcements on lid lock-side panels into lid for added security when closed.
- Hinged lower shelf allows for easy storage of larger objects (except Model 3360).
- Angled handle recess prevents pinch points.
- Hemmed (reinforced) high-strength shelves.
- Continuous, non-removable hinge pins help prevent theft.
- Side-wall storage (except Model 3360).
- Strategically located, easily accessible, durable gas springs provide for ease in opening lid.
- Double hinge cover folds up and out of the way.
- Angled 3-1/2" high support skids.
- Load ramp for storage of larger, heavier items (Model 4872R only).
- Patent pending.



Optional casters available for increased mobility. See page 330 for options

	C	APACIT	Y				DI	MENS	IONS						WEI	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	Е	F	G	Н	Ι	J	K	L	LBS.	kg
3360	38719	34.5	33"	60"	30"	_	12.5"	12"	20"	_	_	_	_	_	256	116
4848	35043	40	48"	48"	30"	11"	7"	12"	27"	2"	3"	17"	—	—	292	132
4860	35057	50	48"	60"	30"	11"	7"	12"	27"	2"	3"	17"	—	—	305	138
4872	07487	60	48"	72"	30"	11"	7"	12"	27"	2"	3"	17"	—	—	360	163
4872R	07488	60	48"	72"	30"	11"	7"	12"	27"	2"	3"	17"	18"	45"	375	170








Utility Cabinets

2-DOOR UTILITY CABINET



4-DOOR UTILITY CABINET





HALF-STORAGE/HALF CABINET BOX



2-DOOR, 30" DEPTH STORAGE CABINET



- · Recessed and concealed lock protector inhibits forced entry and corrosion to lock.
- · Flush-mounted doors.
- Finger-groove door handles.
- Front-door storage. (Rear-door storage also available on Model • 5760 only.)
- Hemmed (reinforced) high-strength shelves.
- Large, lower storage areas for bigger items.
- Continuous, non-removable hinge pins to prevent theft. •
- Angled handle recess to prevent pinch points. •
- Three 3-1/2" high support skids. (Not available on Model 3448.) •
- Weather-resistant design. •
- Open storage for shovels, picks, brooms and other long-handled • tools. (Model 5660LH only.)

for increased mobility. See page 330 for options

· Patent pending.



	(CAPACIT	Y							DIMEN	ISIONS	;							WEI	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	Е	F	G	Н	I	J	K	L	М	N	0	Р	LBS.	kg
5660L	38659	46	56"	60"	24"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	20.5"	_	24"	_	401	182
5660LH	07486	46	56"	60"	24"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	20.5"	50.5"	—	24"	408	185
5760	38722	58.3	56"	60"	30"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	23.5"	_	24"	_	437	198
5760TD	07969	59.3	56"	60"	30"	15"	10.5"	11.5"	10"	10"	2"	14"	3"	23.5"	26.5"	_	24"		467	212



Fax: 800.451.2632


Canada Tel: 800.435.0786 Fax: 800.524.2853

WEIGHT


401 182

LBS. kg

Parts/Fittings Cabinet

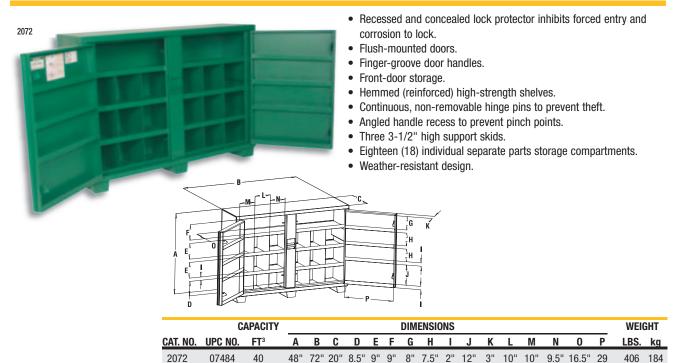

Mesh Cabinet

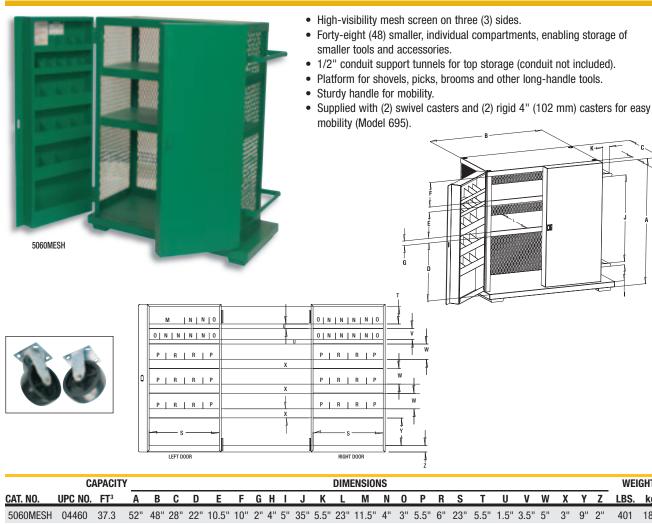

Ð

8



Bi-Fold Cabinet



- Maximum storage capacity with minimum floor space requirements.
- Four individual 15" d. x 14-1/2" h. x 60" w. (381 x 368 x 1524 mm) storage compartments on each side.
- Reinforced steel shelves welded in place for added strength and durability.
- All shelves feature large front lip to keep small items from rolling off.
- Each bi-fold section is mounted on four casters for easy opening and closing.
- Six (6) swivel and (2) rigid 6" (152 mm) casters included for easy mobility (Models 503 and 603).

	(CAPACITY				DIM	ENSI	ONS				WEIG	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	Ε	F	G	H	Ι	LBS.	kg
5860	35068	60.4	58"	60"	30"	13"	13"	12"	1"	57"	14.5"	548	249




₽₿

Cabinet/Workbench



- Recessed and concealed lock protector inhibits forced entry and corrosion to lock.
- Flush-mounted doors.
- Finger-groove door handles.
- Front-door storage.
- Hemmed (reinforced) high-strength shelves.
- Large, lower storage areas for bigger items.
- · Continuous, non-removable hinge pins to prevent theft.
- Angled handle recess to prevent pinch points.
- Weather-resistant design.

	(CAPACITY						DIME	NSIO	NS					WE	GHT
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	Е	F	G	Н	Ι	J	K	L	LBS.	kg
3448	38720	22 5	34"	48"	24"	13.5"	20.5"	17 5"	15"	12 5"	2"	14"	3"	17"	201	91 2





Optional casters available for increased mobility. See page 330 for options





USA Tel: 800.435.0786 Fax: 800.451.2632 Canada Tel: 800.435.0786 Fax: 800.524.2853

Field Office





Tamper-proof lock protectors (for upper and lower doors).



New, slanted work surface with lockable, concealed storage area.




Door grooves provide a gripping surface for convenient opening.



Top door opens with a gas spring and is supported by a locking arm.

- New, slanted work surface with lockable, concealed storage area.
- Concealed lock protectors protect locks from drilling and cutting.
 Weather stripping for maximum protection against bad weather
- and jobsite dust.
- Lid with heavy-duty gas spring and a locking arm for ease of opening and safety.
- Shelving throughout, for organizing and storing jobsite tools and supplies.
- Grooved front doors for ease of opening and storage compartment access.
- Continuous, non-removable pin hinges.
- Overlapping corners, rolled edges, and strategically placed reinforcements for added strength.





	C	APACITY	1				DIN	IENSIO	NS				WEIGHT		
CAT. NO.	UPC NO.	FT ³	Α	В	C	D	Е	F	G	Н	I	J	LBS.	kg	
8060 DLX	04719	116.5	80"	60"	42"	20.6"	26.8"	19.2"	58.8"	14"	15.5"	24"	632	286	



Storage

Mobile Workbench


3548



- Tough composition board work surface on top with built-in chain vise and telescoping wrench stop.
- Removable self-stored shelf enables storage of larger items.
- Supplied with (2) locking swivel casters and (2) rigid 6" (152 mm) casters for easy mobility (Model 703).
- Recessed and concealed lock protector inhibits forced entry and corrosion to lock.
- Flush-mounted doors.
 - Finger-groove door handles.
- Front door storage.
- Hemmed (reinforced) high-strength shelves.
- Large lower storage areas for bigger items.
- Continuous, non-removable hinge pins to prevent theft.
- Angled handle recess to prevent pinch points.









Welder's Boxes





- Protects small tools and supplies. Single lock hasp for use with padlock.
- Compact side handles for easy portability.
- Heavy-duty hinges, plus chain connector to hold lid in open position.

			1	DIMENSIONS	6	
		CAPACITY	HEIGHT	WIDTH	DEPTH	WEIGHT
CAT. NO.	UPC NO.	FT ³				LBS. kg
1230	31510	3.3	12"	30"	16"	48 21.8
1531	23274	4.5	15"	31"	18"	51 23.1



Casters







- Caster bolt pattern 2-7/8" x 3-1/4".
- Polyolefin-injected molded hard rubber casters: stain-resistant, chemical-resistant, and non-marking.
- Recommend #1 and #5 Masterlock padlocks or equivalent.

			WH	EEL				
			DIA.	TREAD			SH	IP
CAT.	UPC		IN.	IN.	CAPA	CITY	WEI	GHT
NO.	NO.	DESCRIPTION	(mm)	(mm)	LBS.	kg	LBS.	kg
503*	28044	4 Swivel	6	2	2000	907	22	10
			(152)	(51)				
603*	23405	2 Rigid,	6	2				
		2 Swivel	(152)	(51)	2000	907	20	9
703†	08420	2 Rigid,	6	2	2000	907	20	9
		2 Locking Swivel	(152)	(51)				
803†	08414	4 Locking Swivel	6	2	2000	907	22	10
			(152)	(51)				
666*	15341	2 Rigid,	4	2	1600	726	13	6
		2 Swivel	(102)	(51)				
695*	30239	2 Rigid,	4	1-1/2	1500	680	10	5
		2 Swivel	(102)	(38.1)				
694*	35113	4 Swivel	4	2	1600	726	13	6
			(102)	(51)				

*Each caster set includes (16) 3/8-16 x 1" self-threading mounting screws.

†Each caster set includes (16) 3/8-16 x 1" carriage bolts; (16) 3/8-16 hex nuts; (16) 3/8 lockwashers.

CASTER SEL	ECTION C	HART					
STORAGE				CASTER			
BOX				CAT NO.			
CAT. NO.	503	603	703	803	666	695	694
1332	1	1			1	1	1
1636	1	1			\checkmark	1	1
2142	1	1			1	1	1
2448	1	1			\checkmark	1	1
2460	1	1			1	1	1
3048	1	1			1	1	1
2472	1	1			1	1	1
1230							
1531							
5060MESH	1	1			\checkmark	1	1
3360	1	1			1	1	1
4848	1	1			1	1	1
4860	1	1			1	1	1
4872	1	1			1	1	1
4872R	1	1			1	✓	1
2260	1	1			1	1	1
3648	1	1			1	✓	1
3660	1	1			1	1	1
3448	1	1			1	1	1
5660L	1	1			1	1	1
5660LH	1	1			1	✓	1
5760	1	1			1	1	1
5760TD	1	1			1	✓	1
5860			Included	Included			
3548			Included	1			
8060DLX					1		1

Replacement Parts

REPLACEN	IENT PART	S
CAT. NO.	UPC NO.	DESCRIPTION
06291	06291	Box Caster Bolt Set (16-Bolt Kit)
08426	08426	Box Caster Bolt Set 16-Bolt Kit (3548, 5860 only)
35438	35438	Lid Support Kit – (R) and (L) Locking Arms (1332,1636, 2142)
27472	27472	Lid Support – (L) Side (2448, 3048, 2460, 2472, 2260)
27471	27471	Lid Support – (R) Side (2448, 3048, 2460, 2472, 2260)
08428	08428	10 mm Gas Spring Ball Stud Replacement Kit
		(all Slant/Flat-Tops)
53950	53950	Gas Springs for 2260
53904	53904	Gas Springs for 3360, 4848 and 4860 Storage Boxes
53951	53951	Gas Springs for 3648 and 3660
04339	04339	Latch Repair Kit (5860)
54997	54997	Latch (5860)
54998	54998	Strike (5860)
55124	55124	Latch Threaded Rod (5860)
08427	08427	13 mm Gas Spring Ball Stud Replacement Kit (8060 DLX)
08404	08404	Replacement Gas Spring Kit – Shock and (2) Clips (8060 DLX)
01886	01886	Replacement Gas Spring Kit for 4872